



TheLEN Armaturen
since 1984




THELEN „Connector Clamp“

24h Emergency-number: +49 (0) 173 - 74 85 855

www.thelen-armaturen.com



Thelen Connector Clamp

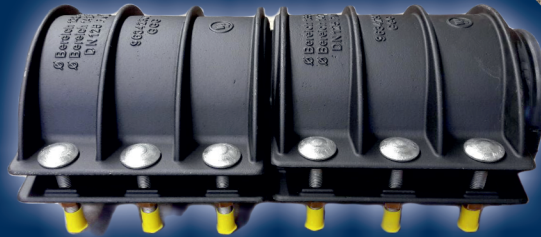

The **Thelen Connector Clamp** is a repair clamp like many others but with a cleverly designed and simple overlapping feature which allows 2, 3 or an infinite number of clamps to be connected together.

It is the first repair clamp that can be extended and connected in this way.

The Connector Clamp is a 100% German product which guarantees an extremely high level of quality. The seal is a moulded part, typically giving a tolerance range between 8 and 16 mm depending on the size. It can cope with angular deflection of up to 3 degrees and can even cope with a circumferential gap or ring fracture of up to 2cms. The main body casting also has full side flanges where the bolts are fitted, so there are no lugs to snap or break off.







Thelen Connector Clamp



RDS 12L extendable



Pipe DN	Tolerance mm	Length mm	Item-no. galvanized	Item-no. A2	Weight kg	Bolts
40	44 – 52	200	12040	12040V	4.3	M12x60
40	54 – 61	200	12041	12041V	4.3	M12x60
50	60 – 68	200	12050	12050V	4.7	M12x60
60/65/ 70	76 – 87	200	12065	12065V	5.5	M12x60
80	89 – 98	205	12080	12080V	9.8	M16x90
80	95 – 108	205	12081	12081V	9.8	M16x90
100	108 – 118	240	12100	12100V	12.2	M16x90
100	116 – 128	240	12101	12101V	12.2	M16x90
125	133 – 144	245	12125	12125V	17.6	M16x90
125	142 – 153	245	12126	12126V	17.6	M16x90
150	159 – 172	300	12150	12150V	25.6	M16x110
150	168 – 184	300	12151	12151V	25.6	M16x110
200	214 – 225	405	12200	12200V	39	M16x110
250	267 – 274	406	12250	12250V	56	M20x140
300	315 - 326	500	12300	12300V	83.5	M20x140

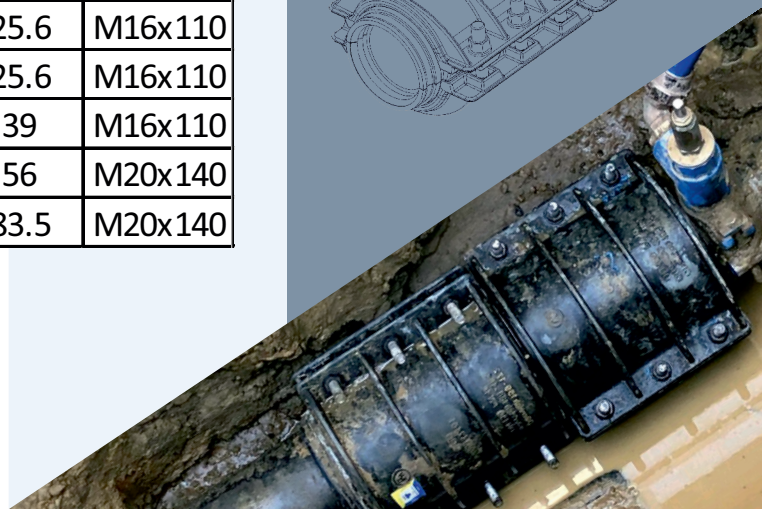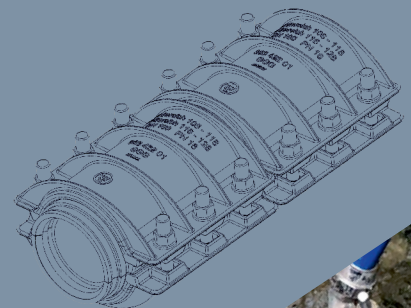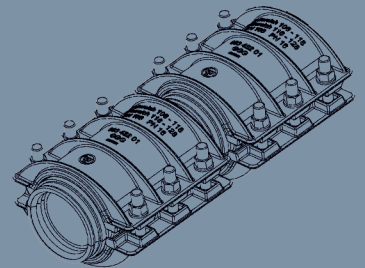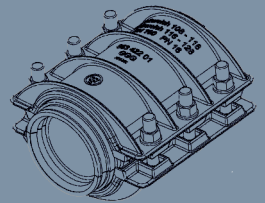



www.thelen-armaturen.com

Löhdorfer Straße 156-176, 42699 Solingen

Tel: +49 212 – 22670-0 • Fax: +49 212 – 22670-25

E-Mail: post@thelen-solingen.de • www.thelen-armaturen.com